



Jumpax acoustic underlay is recommended by Amtico (used as per instructions)

Superb Smooth Finish ready for Floor-covering

Dry, Fast-track Preparation of Virtually Any Substrate

Easy to use, Environmentally Friendly Product

Warm, Quiet & Comfortable Underfoot

Impact Sound Reduction of 21 dB ΔL_w Tested with vinyl or linoleum, according to BS-EN-ISO 140-8 / 717-2



Exceptionally stable floating underlay for Vinyl, Linoleum & other resilient floors

JUMPAX is suitable for all resilient floorings and types of adhesives in both commercial and domestic situations. It can be used over almost any type of floor construction as well as underfloor heating systems.



This unique product is only 10mm thick, requires only basic tools and skills, but produces a highly professional finish. It provides the solution to a whole range of problems associated with traditional surface preparation methods.

The two self-adhesive components are quickly and easily laid as a free-floating sub-floor, instantly smoothing over typical irregularities and eliminating the need for screeds, primers, plyboards and nails. It is not necessary to remove old floor-coverings, loosening screeds or surface contamination, and failures of new floors due to problem substrates, minor cracks or laitance become a thing of the past. Using the JUMPAX system not only saves considerable time and money, but also removes any risk of damage to pipes and cables in the floor.

Of course, the whole installation can be removed just as easily, without any damage to the original floor finish, should this be required.

UK tests by SRL, on the combination of vinyl or linoleum with Jumpax over a concrete floor produced the reduction of 21 dB ΔL_w in accordance with BS-EN-ISO 140-8 / 717-2. This improvement has been obtained on a concrete base floor with a bonded screed. Additionally, it was shown that the same combinations over a timber floor can greatly improve the performance levels for both impact and airborne sound. Loading of 23 kg / m² was applied to simulate typical conditions when in use. Similar tests by respected institutions in the US and Europe also confirm these figures.

* In case of floating substrate systems the sound reduction of the finished floor covering will always depend on the impact sound reduction of the existing substrate.

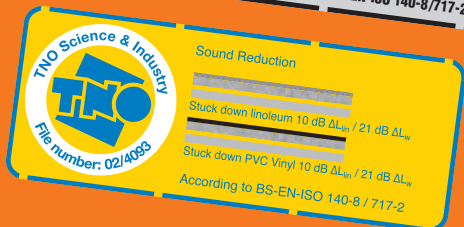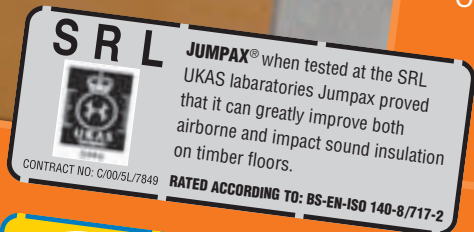

Prepare and lay resilient over any surface the same day !!!

Technical specifications



Article number Jumpax System	0.1160.0000
Jumpax border tiles	0.1160.5000
Jumpax top boards	0.1160.7000
Thickness / Tolerance, (mm)	10 / ± 0.2
Measurement / Tolerance, (mm / m ²)	600 x 1200 / ± 1.5
Raw Material(s) combinations	
MDF, Polystyrene foam with aluminium film	
Density, (kg/m ³)	585
Colour	Natural / Silver
Sound Reduction NEN-BS-EN-ISO 140-8 / 717-2 in combination with 2 mm linoleum and vinyl.	21 dB ΔL_w / 10 dB ΔL_{lin}
TNO Report no.	DGT-RPT-040016
CSTB Report no.	AC01-094
NGC Report no:	7003012
SRL Report no:	C/00/5L/7849
Bending Strength, kg/cm ²	> 40
Fire Class, DIN 4102	B2
Humidity, (%)	4 – 10
Swelling after 24 hours in water, max. (%)	< 40
Thermal resistance (R _m value) [m ² .K.W. ⁻¹]	0,13
Formaldehyde degree	E – 1

Packaging

Installation instructions	Included
Contents per package	4 base boards & 4 top boards / 2.88m ²
Contents per pallet	48 packs / 138.24 m ²
Pallet-Height	1.10 m
Pallet-measurements (l x w x h mm)	1200 x 1200 x 150
Pallet-weight	895 KG

Application

Smoothing and sound reducing sub floor system for linoleum, vinyl and cork

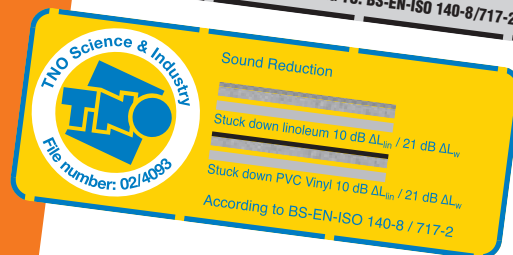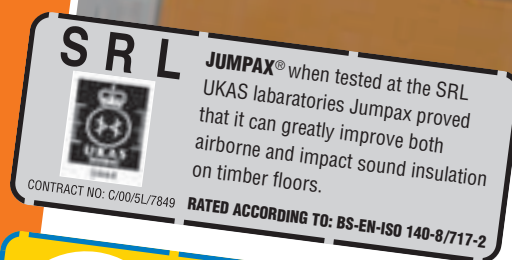

Contents package

4/4

- panels
- 600 x 1200 mm
- 2.88 m²

Thickness 10 mm

CSTB



unifloor
UNDERLAY SYSTEMS